



APPLICATIONS

Rotating anode X-ray tube unit specifically designed for anode diameter inserts ranging from 70mm to 90mm, with medium/high-energy radiographic procedures.

CHARACTERISTICS

- Lead lined aluminum body.
- Safety function steel shield, in case of tube insert breaking.
- Filled under vacuum with insulating oil, specially processed.
- Three devices are present for thermal safety:
 1. a bimetallic thermal switch, fitted externally on the anode end
 2. a bimetallic thermal switch, internally assembled, series connected with stator common cable
 3. a pressure microswitch, installed on cathode end, activated by bellow expansion
- Storage and shipment temperature range from -10°C to $+80^{\circ}\text{C}$
- No user maintenance requested

INSERT FOR RELOADING

- X40
- X50 H - X50 AH
- RTM 78 H/H5
- RTM 90 H/H5 - RTM 92 H/H5

ZC352

ROTATING ANODE X-RAY TUBE UNIT

SPECIFICATIONS


Overall length	440 mm
Maximum diameter	170 mm
Tube assembly net weight	20 kg
Nominal X-ray tube assembly voltage	150 kV
Maximum tube assembly heat content	1280 kJ (1700 kWh)
Maximum continuous heat dissipation without fan	230 W
Maximum continuous heat dissipation with fan	370 W
Minimum tube assembly inherent filtration	1.2 mm Al / 75 kV
Maximum leakage radiation at 1 m from focal spots	0.44 mGy/h




C352



DIMENSIONS

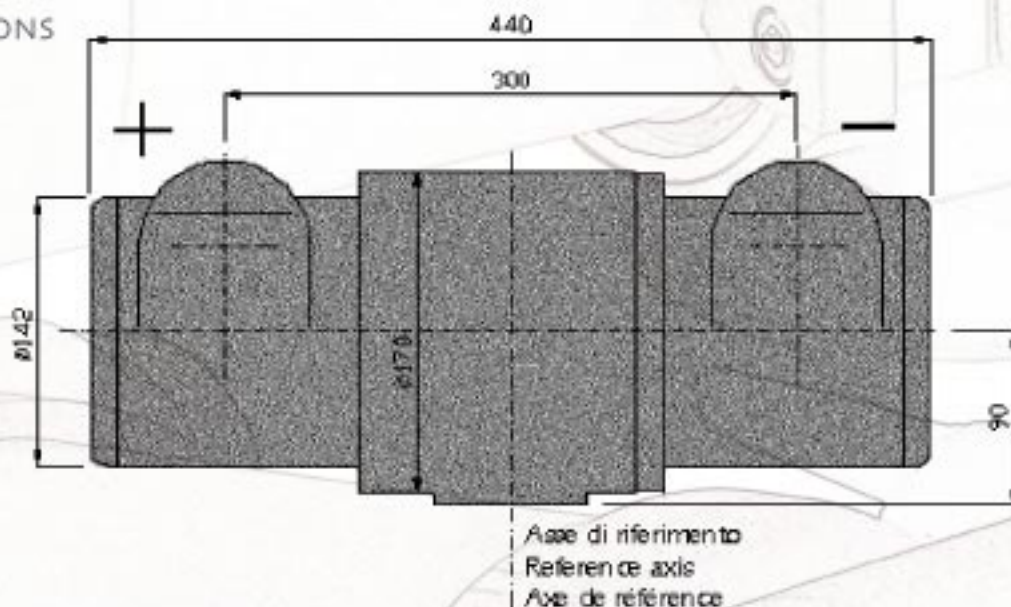

HOUSING HORN ANGLES

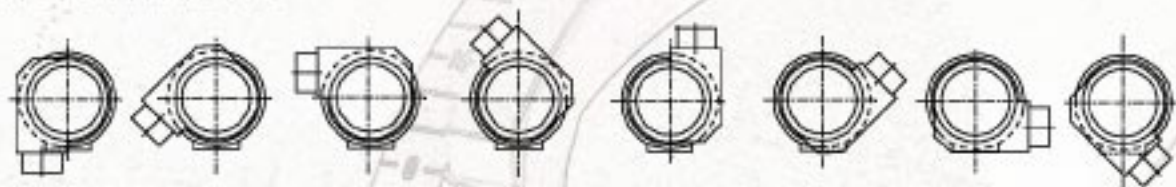

ANGLE	0°	45	90°	135°	180°	225°	280°	315°
IAE CODE	C352_0	C352_45	C352_90	C352_135	C352_180	C352_225	C352_280	C352_315

ORDERING TIPS

To assure that you receive the proper tube assembly, please specify the following information at the time of order:

- horn angle (of the tube housing high voltage receptacles)
- necessity of fan or heat exchanger
- any interface kit that may be required

Should you still have questions about the compatibility of a replacement tube unit call our customer service:
+39 02 66303255

IAE SPA ITALY via Fabio Filzi. 53 20032 CORMANO MI tel +39 02 66303255 fax +39 02 6152544 iaexray@iae.it www.iae.it
IAE FRANCE sas 90, Blvd St. Michel 91150 ETAMPES tel +33 16 4948044 fax +33 16 4949956 iaefrance@wanadoo.fr